





Heavy Duty Fixings

Heavy Duty Clamp

Heavy duty screw clamp for horizontal flanges up to 23mm thick. Supports threaded rod up to 12mm diameter.



Part No.	A (mm)	B (mm)	ø (mm)	S.Load (kg)	Finish
HFL1	17	35	9	110	EZP
HFL2	19	41	11	240	EZP
HFL3	23	46	13	310	EZP

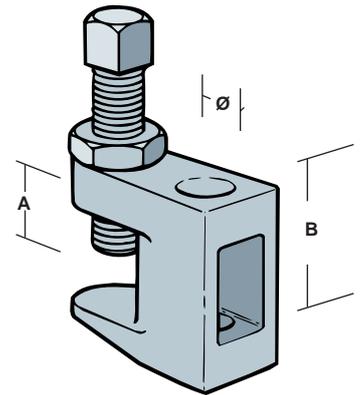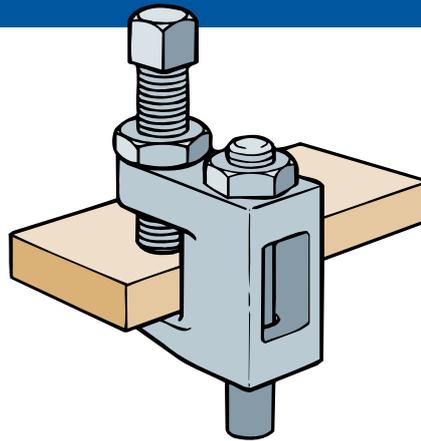

Heavy Duty Threaded Clamp

Heavy duty screw clamp for fixing horizontal or vertical flanges up to 20mm thick. Incorporates two M6 tapped fixing holes.

Part No.	A (mm)	B (mm)	ø (mm)	S.Load (kg)	Finish
HLC	20	35	M6	59	EZP

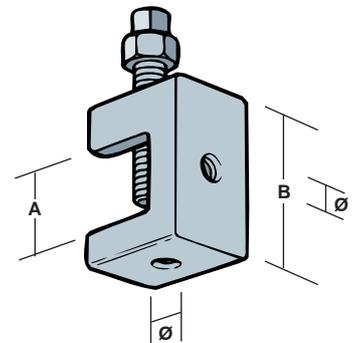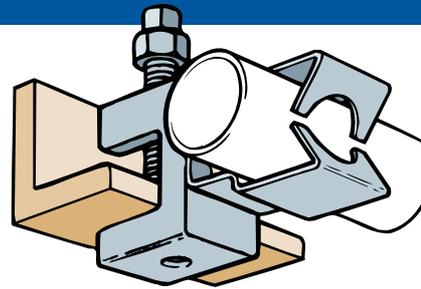

HFLS Articulated Beam Clamp

HFLS is the only swivel beam flange clamp to meet the stringent performance criteria required for FM approval.

The product offers high load bearing capacity, whilst removing the need to bend threaded rod - offering peace of mind for consultants and users alike. It offers articulation to 90° forwards or 45° sideways and backwards, within a compact space.

Part No.	Beam flange (mm)	Rod size	S. Load <25° (kg)	S. Load >25° (kg)	Max angle	Finish
HFLS	0-17	M10	250	150	45°	EZ

